


12970 SERIES - BRASS BALL VALVE NICKEL PLATED NPT X NPT FEMALE QUICK MOUNTING

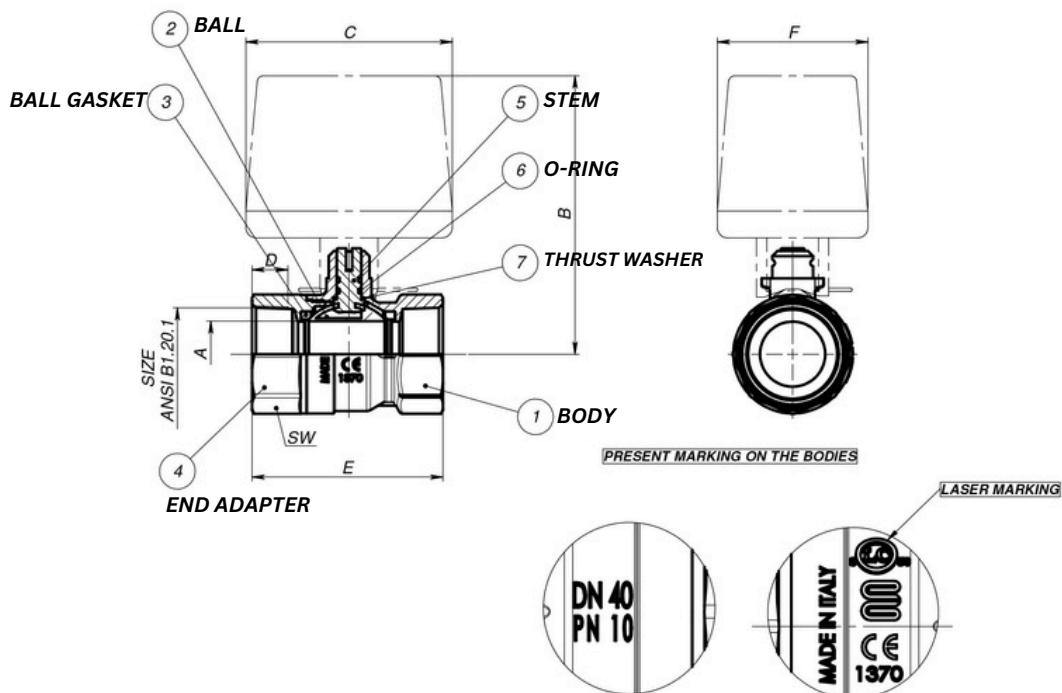

LC
ANSI Z21.15-2001 / CGA 9.1-M97-2001
3-88 US REQUIREMENT FOR MANUALLY OPERATED GAS VALVES FOR USE IN HOUSE PIPING SYSTEMS
CGA CR91-002 MANUALLY OPERATED GAS VALVES FOR USE ON PIPING INSTALLED INDOORS

MADE IN ITALY

SPECIFICATION

BRASS BODY NICKEL PLATED

SIZES: 1/2" - 2"

CONNECTION: NPT FEMALE X NPT FEMALE

ANSI B1.20.1

PRESSURE:

145 PSI

APPLICATION: HOT AND COLD WATER, COMPRESSED AIR, OILS, ALL TYPE OF GASES, NON-AGRESSIVE FLUIDS

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	BODY	EGM.001
2	BALL	EGM.002
3	BALL GASKET	EGM.009
4	END ADAPTER	EGM.001
5	STEM	EGM.064
6	O-RING	EGM.051 + EGM.014
7	THRUST WASHER	EGM.009

DIMENSIONS

INCHES

CODE	SIZE	ØA	B	C	D	E	F	SW	PN
12970-005	1/2"	0.59	3.82	3.94	0.38	2.09	2.85	26	10
12970-007	3/4"	0.79	3.94	3.94	0.44	2.40	2.85	31	10
12970-010	1"	0.98	4.13	3.94	0.50	2.78	2.85	38	10
12970-012	1-1/4"	1.26	4.33	3.94	0.54	3.31	2.85	47	10
12970-015	1-1/2"	1.26	4.33	3.94	0.69	3.58	2.85	54	10
12970-020	2"	1.57	4.57	3.94	0.70	4.13	2.85	65	10