
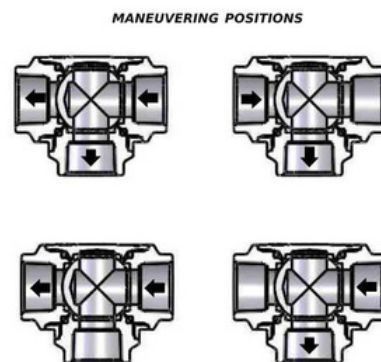


12910 SERIES

3 WAY BRASS BALL VALVE FEMALE X FEMALE X FEMALE NPT ISO 5211 FULL BORE WITH T-PORT

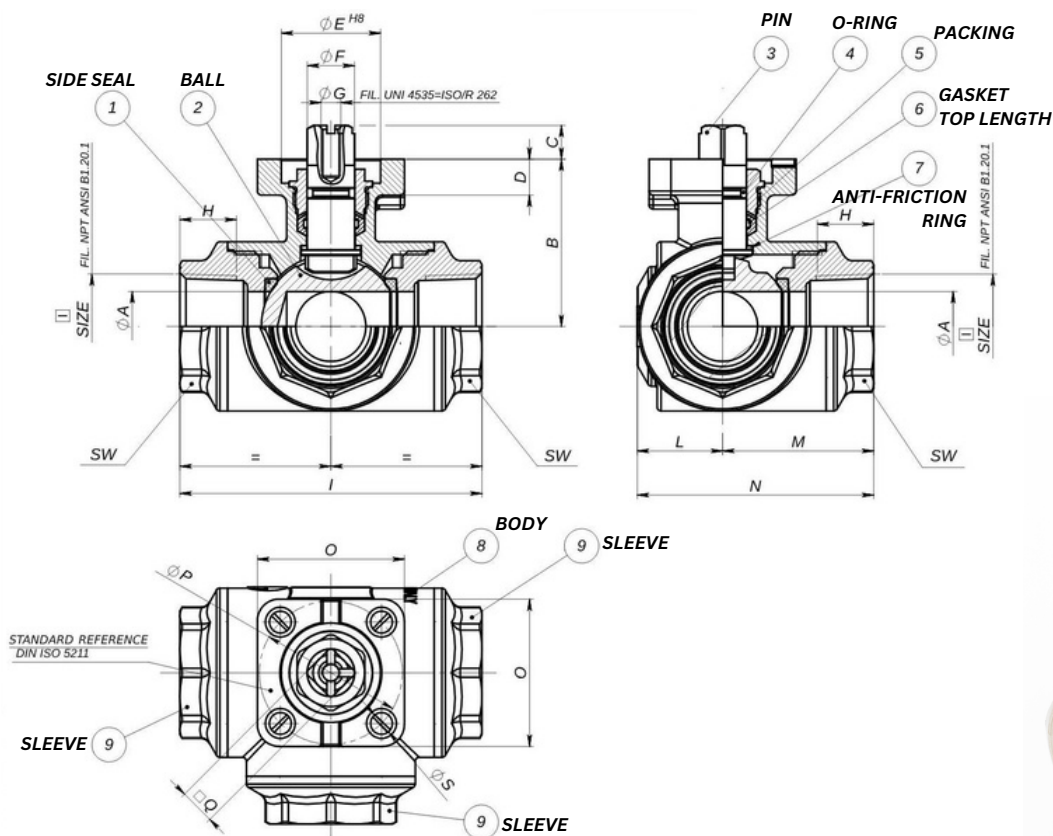

MADE IN ITALY

SPECIFICATION

BRASS BODY NICKEL PLATED

SIZES: 1/4" - 2"

CONNECTION: FEMALE X FEMALE X FEMALE NPT

T-PORT

MOUNTING CONNECTION: ISO 5211

PRESSURE:

580 PSI (1/4" - 1-1/4")

360 PSI (1-1/2" - 2")

TEMPERATURE: -4° F TO 266° F

APPLICATION: HOT AND COLD WATER, AIR, HYDROCARBONS, AND NON-AGGRESSIVE FLUIDS

DIRECTION OF FLOW: IN THE DIRECTION OF THE ARROW

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	SIDE SEAL	EGM.009
2	BALL	EGM.002
3	PIN	EGM.002
4	O-RING	EGM.0.51
5	PACKING	EGM.002
6	GASKET TOP LENGTH	EGM.009
7	ANTI-FRICTION RING	EGM.009
8	BODY	EGM.001
9	SLEEVE	EGM.001

DIMENSIONS

CODE	SIZE	DN	ØA	B	ØC	D	ØE ^{HB}	ØF	ØG	H	I	L	M	N	O	ØP	ØQ	ØS	SW	PN
12910-002	1/4"	0.31	0.31	1.50	0.35	0.35	0.98	0.43	M5 ^A	0.40	2.54	0.67	1.28	1.95	1.46	F3	0.35	0.22	25	40
12910-003	3/8"	0.39	0.39	1.50	0.35	0.35	0.98	0.43	M5 ^A	0.42	2.54	0.67	1.28	1.95	1.46	F3	0.35	0.22	25	40
12910-005	1/2"	0.59	0.56	1.50	0.35	0.35	0.98	0.43	M5 ^A	0.58	2.54	0.67	1.28	1.95	1.46	F3	0.35	0.22	25	40
12910-007	3/4"	0.79	0.69	1.65	0.35	0.35	0.98	0.47	M5 ^A	0.56	2.99	0.85	1.50	2.34	1.46	F3	0.35	0.22	31	40
12910-010	1"	0.98	0.98	1.83	0.35	0.35	0.98	0.47	M5 ^A	0.66	3.82	1.02	1.91	2.93	1.65	F3-F4	0.35	0.22	41	40
12910-012	1-1/4"	1.26	1.26	2.41	0.41	0.39	1.18	0.55	M5 ^A	0.68	4.65	1.44	2.32	3.76	1.89	F4-F5	0.43	0.22-0.26	55	40
12910-015	1-1/2"	1.57	1.50	2.5	0.41	0.39	1.18	0.55	M5 ^A	0.68	5.30	1.50	2.66	4.15	1.89	F4-F5	0.43	0.22-0.26	55	25
12910-020	2"	1.97	1.77	2.91	0.53	0.47	1.38	0.70	M5 ^A	0.70	6.18	1.69	3.09	4.78	1.89	F5	0.55	0.26	67	25