


12580 SERIES

BRASS BALL VALVE SOCKET X FLARE

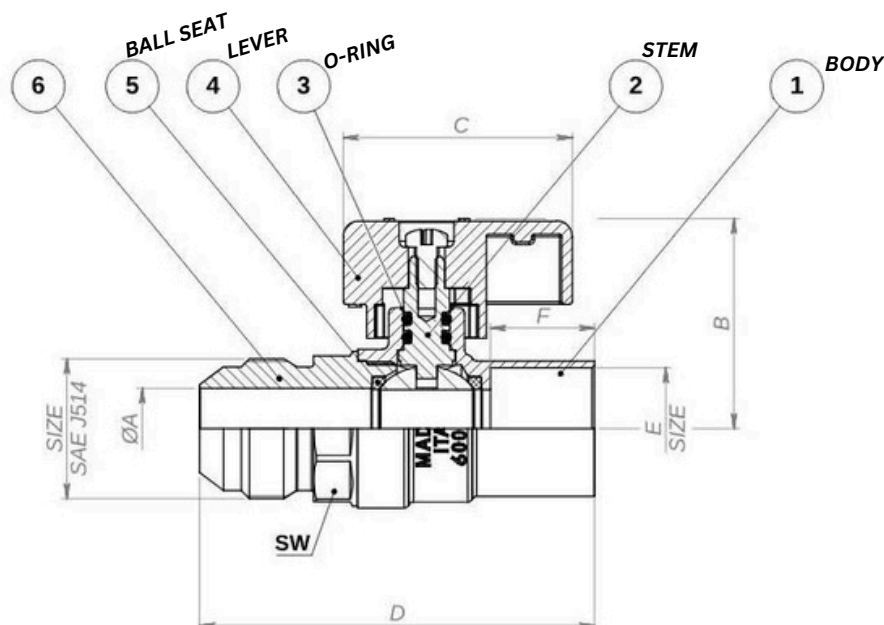

MADE IN ITALY

SPECIFICATION

BRASS BODY

SIZES: 1/2" X 5/8" AND 3/4" X 7/8"

CONNECTION: SOCKET X FLARE

BLACK T-HANDLE

UNI EN 12164 - UN EN 12165

PRESSURE:

580 PSI

TEMPERATURE: -4° F TO 266° F

APPLICATION: HOT AND COLD WATER,
COMPRESSED AIR, AIR, NON-AGGRESSIVE MEDIA

DIRECTION OF FLOW: IN BOTH WAYS

COMPONENTS

N°	DESCRIPTION	MATERIAL
1	BODY	CW 617N
2	STEM	CW614N
3	O-RING	FKM
4	LEVER	ALUMINIUM
5	BALL SEAT	PTFE
6		UNI
7	BALL	CW614N
8	SCREW	STEEL

DIMENSIONS

CODE	SIZE	DN	ØA	B	C	D	E	F	G	SW	PSI	PN	CV
12580-005	1/2" X 5/8"	0.49	0.39	1.54	1.73	2.52	0.63 ^{0/-0.1}	0.64 ^{+0.15/-0}	3/4-0.62-2A UNF	0.98	600	400	9.3
12580-007	3/4" X 7/8"	0.59	0.61	1.59	1.73	2.99	0.88 ^{+0.1/-0}	0.79 ^{+0.15/-0}	1"1/16-0.47-2A UN	1.10	600	400	18